

Self-stabilizing Numerical Iterative Computation¹

Danny Bickson^a, Ezra N. Hoch^b, Harel Avissar^b and Danny Dolev^b

^a *IBM Haifa Research Lab*

Mount Carmel

Haifa 31905, Israel

Email: {dannybi}@il.ibm.com

^b *School of Computer Science and Engineering*

The Hebrew University of Jerusalem

Jerusalem 91904, Israel

Email: {hoch,harela01,dolev}@cs.huji.ac.il

Abstract

Many challenging tasks in sensor networks, including sensor calibration, ranking of nodes, monitoring, event region detection, collaborative filtering, collaborative signal processing, *etc.*, can be formulated as a problem of solving a linear system of equations. Several recent works propose different distributed algorithms for solving these problems, usually by using linear iterative numerical methods.

The main problem with previous approaches is that once the problem inputs change during the process of computation, the computation may output unexpected results. In real life settings, sensor measurements are subject to varying environmental conditions and to measurement noise.

We present a simple iterative scheme called SS-ITERATIVE for solving systems of linear equations, and examine its properties in the self-stabilizing perspective. We analyze the behavior of the proposed scheme under changing input sequences using two different assumptions on the input: a box bound, and a probabilistic distribution.

As a case study, we discuss the sensor calibration problem and provide simulation results to support the applicability of our approach.

Key words: Self-stabilization, numerical iterative methods, Jacobi algorithm, sensor-networks

¹Preliminary version of this work appeared in the 10th International Symposium on Stabilization, Safety, and Security of Distributed Systems (SSS), Detroit, Nov. 2008.

1. Introduction

Many challenging tasks in sensor networks, for example distributed ranking algorithms of nodes and data items [4], collaborative filtering [1], localization [14], collaborative signal processing [16], region detection [13], etc., can be formulated as a problem of solving a linear system of equations. Several recent works [14],[16],[13] propose different distributed algorithms for solving these problems, usually by linear iterative numerical methods.

In this work, we extend the settings of the above approaches by adding another dimension to the problem. Specifically, we are interested in *self-stabilizing* algorithms, that continuously run and converge to a solution from any initial state. This aspect of the problem is highly important due to the dynamic nature of the network and the frequent changes in the values being tracked.

As a case study, we show that the calibration of local sensors' readings can be formulated as a linear system of equations $A\mathbf{x} = \mathbf{b}$, where $\mathbf{x}$ represents the calibrated output reading, $\mathbf{b}$ represents the local reading, and A represents a weighted communication graph. However, our work is general and can be applied to any problem that can be formulated as a distributed solution to a linear system of equations, including the previous works mentioned above.

The main challenge we have faced in this work, is that in the classical linear algebra literature, $\mathbf{b}$ is assumed to be constant. In our settings, the environment is constantly changing and the computed algorithm never terminates, leading to constantly changing values of $\mathbf{b}$. In this paper, we ask the following question: "Is it possible to devise a self-stabilizing numerical iterative method?" We answer affirmatively, and show that under minor conditions it is possible to devise a self-stabilizing algorithm that solves a dynamic system of linear equations, where the input to the system is constantly changing.

We analyze the behavior of the proposed scheme under changing input sequences using two different assumptions on the input behavior: a box bound, and a probabilistic bound. We show that in both cases, once the network stabilizes there is a guarantee on the quality of the computation.

One of the most efficient distributed approaches for solving a set of linear equations of the type $A\mathbf{x} = \mathbf{b}$ is by using linear iterative algorithms. Unlike Gaussian elimination, which has a cost of $O(n^3)$, where n is the number of

variables, an iterative algorithm usually solves a system of linear equations in time of $O(n^2r)$ where r is the number of iterations, which depends on the properties of the matrix A . In many real life problems, the convergence is logarithmic in n , for example in multiuser detection [5]. These algorithms are naturally distributed and work well in asynchronous settings. Furthermore, when converging, the algorithms converge to a solution from *any* initial state. An excellent survey of such methods is found in [2].

The main novel contribution of this paper is in analyzing the self-stabilizing properties of algorithms from the linear iterative methods domain. For example, in a practical setting, it is highly unreasonable to assume that sensor readings do not change over time. However, it is reasonable to assume that at steady state the change in sensor readings is bounded. Informally, in this work we show that once the input readings are bounded, the output solution is bounded as well. This useful observation enables us to tie together numerical iterative methods and dynamically changing environments in a self-stabilizing manner.

To the best of our knowledge, this is the first work tackling this challenging problem. We believe that our approach can have numerous applications in the field of distributed self-stabilizing computation.

Other works discuss fault tolerance aspects of distributed computation. For example, overcoming faults in sensors by averaging the input was investigated in [15], using a centralized algorithm. Quantifying faulty nodes' effect on the system's output is discussed in [11] and [8]. These papers consider bounded input paths and their effect on the stability of the output. In [9] infinite input paths are considered under the assumption that only specific sensors' input may change. All three papers consider discrete input values, as opposed to a continuous set of input values discussed in this paper.

The paper is constructed as follows. [Section 2](#) defines the model and presents the problem definition. [Section 3](#) discusses measurement error types and characterization. [Section 4](#) presents our novel algorithm SS-ITERATIVE. [Section 5](#) analyzes our algorithm and gives bounds on the convergence rate, assuming a box bound on the inputs. [Section 6](#) extends our construction to the asynchronous case. [Section 7](#) extends the analysis of SS-ITERATIVE under a probabilistic model when the input is characterized using a normal distribution. [Section 8](#) presents experimental results of running SS-ITERATIVE using sample topologies. We conclude in [Section 9](#).

2. Model and Problem Definition

Consider a distributed system of sensors measuring real-world data. Sensors are located in different areas; for example, the sensors are spread throughout a building and they measure the temperature to adjust the heating or cooling. We would like the collected data to be as reliable as possible, reflecting closely the changing environmental conditions. One of the obstacles we face when designing algorithms that collect data from a sensor network are measurement errors. There are two main types of inaccuracies of sensors' measurements: noisy environment and sensing equipment which is not calibrated. In our setting sensors are allowed to communicate among themselves and to use data from other nodes for calibrating their environmental readings. Furthermore, we would like our calibration algorithm to have fault-tolerance properties. Specifically, we are interested in self-stabilizing algorithms [10], which converge to an optimal solution from any initial state. Observe that self-stabilization helps also in deploying the sensors. There is no need to explicitly synchronize the sensors, once enough of them are deployed and begin functioning the results will converge to the expected value.

We model the sensor calibration problem as follows. Given a directed communication graph $G = (V, E)$, V is the set of nodes $V = \{p_1, \dots, p_n\}$, E is the set of weighted edges connecting them (weights can be negative). Edge weights are used to model the directional dependence between nodes' outputs; *i.e.*, if $w_{p_i, p_j} = 0$ then there is no edge between p_i and p_j and their output is not directly dependent on each other. In addition, it is possible to have a non-zero self connected edge, $w_{p_i, p_i} \neq 0$, which represents the weight of p_i 's own input. Note that the graph does not have to be symmetric, which means that it is possible that $w_{p_i, p_j} \neq w_{p_j, p_i}$. We denote $N(p_i)$ as the set of node p_i 's neighbors, excluding p_i .

Initially, we assume a synchronous system: during a single round of communication, any pair of connected nodes may send a single message on each directed edge. In each round r , each node p_i has a scalar input value $I_{p_i}(r)$, which represents the local reading of the sensor.² In addition, p_i outputs its output value, which is denoted by $O_{p_i}(r)$; both inputs and outputs are from the domain of real numbers. Denote by $I(r)$ the input vector of the entire system at round r , and by $O(r)$ the output vector of the system at the end

²For simplicity of notations we use scalar variables in the paper. An extension to the vector case (where each sensor measures a set of measurements) is immediate.

of round r . In [Section 6](#) we relax the assumption of synchronous rounds and provide a variant of the algorithm that works in asynchronous settings.

The schematic operation of each node p_i at round r is composed of the following steps: (a) read the value of $I_{p_i}(r)$; (b) send messages; (c) receive messages; and (d) do some processing and output $O_{p_i}(r)$. Then a new round is started, and the nodes continue so forever.

Definition 1. A **configuration** $\mathcal{C}$ of the system at round r consists of the state of each node prior to performing any operation at round r ; this configuration is denoted by $\mathcal{C}(r)$.

Definition 2. An **input sequence** $\mathcal{I}$ of length ℓ is a list of ℓ vectors such that each $\mathbf{v} \in \mathcal{I}$ is a possible input vector of the system (i.e., $\mathbf{v} \in \mathfrak{D}$, the domain of allowed values). An **output sequence** $\mathcal{O}$ of length ℓ is a list such that each $\mathbf{v} \in \mathcal{O}$ can potentially be an output vector of the system.

Definition 3. A step from configuration $\mathcal{C}$ to configuration $\mathcal{C}'$ on input vector $\mathbf{v}$ is **legal** if $\mathcal{C}'$ is reached from $\mathcal{C}$ by the system when having $\mathbf{v}$ as the input vector. $\mathbf{u}$ is **produced** by a legal step if $\mathbf{u}$ is the output vector of the system resulting from such a legal step.

Definition 4. A **run** of a system on input sequence $\mathcal{I} = \{\mathbf{v}(1), \dots, \mathbf{v}(\ell)\}$ starting from configuration $\mathcal{C}(r)$ is the sequence $\mathcal{C}(r), O(r), \mathcal{C}(r+1), O(r+1), \dots$ s.t. for any $i \geq 0$: the step from $\mathcal{C}(r+i)$ to $\mathcal{C}(r+i+1)$ on input vector $\mathbf{v}(i+1)$ is legal, and $O(r+i)$ is produced by that legal step. The system is said to produce the output sequence $\mathcal{O} = \{O(r), \dots, O(r+\ell-1)\}$.

In the special case when the sensor observations (the input to the system) are fixed, the output decision of the sensors should converge to a solution that preserves the linear relations among node inputs and outputs. More formally, consider an input sequence $\mathcal{I}$ of identical input vectors; i.e., $\mathcal{I} = \{\mathbf{v}, \mathbf{v}, \mathbf{v}, \dots\}$. It is desired that for such an input a run from any configuration $\mathcal{C}$ on $\mathcal{I}$ would end up producing an output sequence $\mathcal{O} = \{\mathbf{u}(1), \mathbf{u}(2), \dots\}$ such that $\|\mathbf{u}(i) - \mathbf{u}\| \rightarrow 0$ as $i \rightarrow \infty$, for a $\mathbf{u}$ that solves the following linear system of equations:

$$\mathbf{u}_i = w_{p_i, p_i} \mathbf{v}_i + \sum_{p_j \in N(p_i)} w_{p_i, p_j} \mathbf{u}_j . \quad (1)$$

We assume that the above set of equations are uniquely solvable, denoting $\mathbf{u}$ as the solution to $\mathbf{v}$.

The following definition bounds the change in sensor observations:

Definition 5. An input sequence $\mathcal{I} = \{\mathbf{v}(1), \mathbf{v}(2), \dots, \mathbf{v}(\ell)\}$ is δ -bounded around $\mathbf{v}$ if for every i , $1 \leq i \leq \ell$, it holds that $\|\mathbf{v}(i) - \mathbf{v}\|_\infty \leq \delta$.³

Definition 5 states that a sequence $\mathcal{I}$ is δ -bounded if all the vectors in $\mathcal{I}$ are bounded within an n dimensional hypercube with an edge 2δ , centered around a point $\mathbf{v}$. We note that once changes in the input are not bounded, then no efficient algorithm (especially in a network that is sparsely connected) can calculate the output fast enough. Thus it is easy to construct an example where the diameter of the communication graph is $\mathcal{D}$, for some system of equations it would take at least $\mathcal{D}$ rounds for the information exchange for input readings at one side of the network to propagate to the other side of the network.

Definition 6. Let $\mathcal{I}$ be an input sequence that is δ -bounded around $\mathbf{v}$ and let $\mathbf{u}$ be the solution to input $\mathbf{v}$. A run from configuration $\mathcal{C}$ on input sequence $\mathcal{I}$ ϵ -converges to its solution if the produced output sequence $\mathcal{O} = \{\mathbf{u}(1), \mathbf{u}(2), \dots, \mathbf{u}(\Delta t)\}$ satisfies that $\|\mathbf{u}(\Delta t) - \mathbf{u}\|_\infty \leq \epsilon(\Delta t, \delta, \mathcal{C})$; where ϵ is a function of $\Delta t, \delta$ and $\mathcal{C}$.

Definition 6 requires that if - starting from configuration $\mathcal{C}$ - the inputs are in an n dimensional hypercube of radius δ around $\mathbf{v}$ then the output at time Δt is bounded within some n dimensional hypercube around $\mathbf{u}$ with radius $\epsilon(\Delta t, \delta, \mathcal{C})$. We aim at an $\epsilon(\Delta t, \delta, \mathcal{C})$ that decreases as Δt increases, as long as the inputs are bounded by the same $\mathbf{v}$ -centered, δ -radius hypercube. Clearly, for $\delta > 0$, $\epsilon(\Delta t, \delta, \mathcal{C}) > 0$ for any Δt . That is, there is some minimal radius $\delta' > 0$ around $\mathbf{u}$ and we cannot ensure a tighter bound.

The above definition considers a single initial configuration, and a single input sequence $\mathcal{I}$. We are interested in an algorithm that works for all initial configurations and all input sequences.

Definition 7. An algorithm $\mathcal{A}$ ϵ -converges for δ -bounded input sequence $\mathcal{I}$ if every run (from any configuration) on $\mathcal{I}$, ϵ -converges to its solution. An algorithm $\mathcal{A}$ ϵ -always converges if for every δ -bounded input sequence $\mathcal{I}$, $\mathcal{A}$ ϵ -converges.

³ $\|\mathbf{x}\|_\infty = \max_i \{|\mathbf{x}_i|\}$.

Definition 7 formally defines the problem at hand, as an algorithm $\mathcal{A}$ that *always converges* has the desired self-stabilizing property: for any system state, once the sensors' readings changes are bounded, the change in output of the entire system is bounded as well.

Our goal is to find an algorithm $\mathcal{A}$ that is ϵ -always converging for a provably “good” ϵ . Moreover, we aim at having $\mathcal{A}$ efficient also in its message complexity and the simplicity of the code, allowing lightweight sensors to actually implement it.

3. Measurement Errors

As mentioned in the introduction, sensor readings suffer from two types of inaccuracies: measurement errors and calibration errors. In this section we elaborate on two common types of measurement errors. This introduction serves as a motivation for bounding the errors using a normal distribution, a construction that is discussed in detail in [Section 7](#).

Most physical sensors tend to suffer from noise, which is defined as fluctuations in external factors to the stream of target information (signal). Most sensor noise can be attributed to a small number of common noise patterns, this noise is usually due to the nature of physical substance being measured and the nature of the measurement equipment. Two of the most common noise patterns are Shot Noise and Nyquist Noise as defined at [\[6\]](#).

Definition 8. Shot Noise *is a type of noise common to the particle-like nature of the charge carriers. It is often thought that a DC current flow in any semiconductor material is constant at every instant. In fact, however, since current flow is made up of individual electrons and holes, it is only the time average flow of these charge carriers that is seen as a constant current. Any fluctuation in the number of charge carriers at any instance produces a random current change in the instance.*

As these particles (usually photons or electrons) distribute with Poisson distribution the noise itself also follows this distribution. Poisson distribution is nearly Gaussian and can easily be approximated by a Normal distribution.

Definition 9. Nyquist Noise *(also Thermal noise): In any conducting medium whose temperature is above absolute zero (0 Kelvin), the random motion of charge carriers within the conductor produces random voltages and currents. These voltages and currents produce noise.*

This noise is nearly white by nature (equally distributed through the spectrum). It is characterized by a normal distribution of its amplitude.

Both noise types discussed above are nearly Gaussian [12]. Therefore tolerance to Gaussian noise is an important issue when examining the sensor calibration problem, specifically, and for systems in general. Furthermore, the central limit theorem states that in the average case any i.i.d sample is bound to be distributed as a Gaussian surrounding the mean. This makes Gaussian tolerance a powerful tool when dealing with dynamic input sequences.

4. Our Proposed Solution

Getting back to the sensor calibration example, let W be the matrix that has $w_{i,j}$ as entries, Eq. (1). It be written in linear algebra notation, (s.t. it applies to all nodes simultaneously):

$$W\mathbf{u} = \mathbf{v} . \quad (2)$$

If we consider a non-self-stabilizing system in which the inputs do not change (that is, the input is fixed, as some $\mathbf{v}$), then Eq. (2) can be seen as $A\mathbf{x} = \mathbf{b}$, where A and $\mathbf{b}$ are given. In such a case, we are interested in finding the value of $\mathbf{x}$, which is a vector of n unknown variables. However, we are interested in the case where $\mathbf{v}$ changes over time, and thus Eq. (2) does not describe the problem properly, but rather helps in understanding the motivation for our solution.

Rearranging Eq. (1) we get:

$$O_{p_i}(r+1) = w_{p_i,p_i}I_{p_i}(r+1) + \sum_{j \neq i} w_{p_i,p_j}O_{p_j}(r) . \quad (3)$$

Clearly, for the case of $\delta = 0$, a 0-bounded input sequence $\mathcal{I}$, if $(O_{p_i}(r+1) - O_{p_i}(r)) \rightarrow 0$ as $r \rightarrow \infty$ then Eq. (3) converges to the solution of Eq. (1). Thus, if the update rule of Eq. (3) is executed simultaneously by all nodes, and for all of the nodes $(O_{p_i}(r+1) - O_{p_i}(r)) \rightarrow 0$, then it also solves Eq. (2). That is, if each node locally executes Eq. (3) then the global solution is reached. This observation motivates algorithm SS-ITERATIVE in Figure 1.

Remark 1. *In SS-ITERATIVE there is no notion of the “current round number r ”. That is, p_i reads and writes to the variables I_{p_i} and O_{p_i} without being*

Algorithm SS-ITERATIVE

```

01: Each round do: /* executed on node  $p_i$  */
    /* send current value of  $O_{p_i}$  to all neighbors */
02:   for each  $p_j \in N(p_i)$ 
03:     send  $O_{p_i}$  to  $p_j$ ;

    /* update  $O_{p_i}$  according to values sent by neighbors */
04:   set  $O_{p_i} := w_{p_i, p_i} I_{p_i}$ ;
05:   for each value  $O_{p_j}$  received:
06:     update  $O_{p_i} := O_{p_i} + w_{p_i, p_j} O_{p_j}$ ;

07: od.

```

Figure 1: A self-stabilizing iterative algorithm.

“aware” of r . When we discuss the algorithm “from the outside”, we will consider $I_{p_i}(r)$ and $O_{p_i}(r)$ instead of just I_{p_i}, O_{p_i} .

Consider p_i as running at some round $r + 1$. When p_i performs Line 03, it sends the value of O_{p_i} . The last time O_{p_i} was updated was at Line 04 and Line 06 of round r . Thus, the value sent by p_i at round $r + 1$ is actually $O_{p_i}(r)$. Therefore, the values received from p_j by p_i and used to update $O_{p_i}(r + 1)$ are $O_{p_j}(r)$. However, the value read by p_i in Line 04 is the value of $I_{p_i}(r + 1)$. Concluding that p_i updates $O_{p_i}(r + 1)$ exactly according to Eq. (3).

Remark 2. Each node p_i must know the values of w_{p_i, p_j} as “part of the code”. Thus, these values cannot be subject to transient faults.

5. Analysis of SS-Iterative

Paper [2] shows that the update rule of Eq. (3) can be written in linear algebra form as

$$O(r + 1) = AI(r + 1) + BO(r), \quad (4)$$

where A is a diagonal matrix with w_{p_i, p_i} in the main diagonal, and $B_{ij} = w_{p_i, p_j}$ for $i \neq j$

$$A \triangleq (\text{diag}(W))^{-1}, \quad B \triangleq (I_{n \times n} - \text{diag}(W)^{-1}W), \quad (5)$$

where $I_{n \times n}$ is the identity matrix. Using this update rule to solve a set of linear equations iteratively is known as the Jacobi algorithm.

Let $\mathcal{I}$ be an input sequence of length ℓ that is δ -bounded around vector $\mathbf{v}$. At some round r , $\mathcal{I} = I(r), I(r+1), \dots, I(r+\ell-1)$. Note that SS-ITERATIVE saves a single scalar variable at each node, and thus the configuration of round $r+1$ can be defined by the value of $O(r)$ at round r . Consider SS-ITERATIVE's run, starting from an arbitrary configuration at round r . We aim at showing that $O(r+\Delta t)$ is bounded by a hypercube centered at $\mathbf{u}$. Denote by $\mathbf{c}(\Delta t) \triangleq O(r+\Delta t) - \mathbf{u}$. If we show that $\|\mathbf{c}(\Delta t)\|_\infty$ is bounded (as Δt increases), then $O(r+\Delta t)$ is within a bounded hypercube centered at $\mathbf{u}$. Consider $\mathbf{c}(1)$:

$$\begin{aligned} \mathbf{c}(1) &= O(r+1) - \mathbf{u} \\ &= AI(r+1) + BO(r) - (A\mathbf{v} + B\mathbf{u}) \\ &= A(I(r+1) - \mathbf{v}) + B(O(r) - \mathbf{u}) \\ &= A(I(r+1) - \mathbf{v}) + B\mathbf{c}(0). \end{aligned} \tag{6}$$

Since $\mathcal{I}$ is a δ -bounded input sequence around $\mathbf{v}$, each $I(r+\Delta t)$ can be denoted as $\mathbf{v} + \mathcal{D}(r+\Delta t)$ s.t. $\mathcal{D}(r+\Delta t) \in \mathbb{R}^n$ is a vector, and $\|\mathcal{D}(r+\Delta t)\|_\infty \leq \delta$.

Claim 1. *At round $r + \Delta t$, it holds that*

$$\mathbf{c}(\Delta t) = \sum_{j=0}^{\Delta t-1} B^j A \mathcal{D}(r + \Delta t - j) + B^{\Delta t} \mathbf{c}(0).$$

Proof: Proof by induction. The base of the induction was shown for $\mathbf{c}(1)$; see [Eq. \(6\)](#). Assume that the claim holds for $\Delta t = k$. Thus, $\mathbf{c}(k) = \sum_{j=0}^{k-1} B^j A \mathcal{D}(r+k-j) + B^k \mathbf{c}(0)$. By the update rule in [Eq. \(4\)](#), we have that $O(r+k+1) = AI(r+k+1) + BO(r+k)$. Combining the two equations

implies

$$\begin{aligned}
\mathbf{c}(k+1) &= O(r+k+1) - \mathbf{u} \\
&= AI(r+k+1) + BO(r+k) - (A\mathbf{v} + B\mathbf{u}) \\
&= A(I(r+k+1) - \mathbf{v}) + B(O(r+k) - \mathbf{u}) \\
&= A\mathcal{D}(r+k+1) + B\mathbf{c}(k) \\
&= A\mathcal{D}(r+k+1) + \sum_{j=0}^{k-1} B^{j+1}A\mathcal{D}(r+k-j) + B^{k+1}\mathbf{c}(0) \\
&= A\mathcal{D}(r+k+1) + \sum_{j=1}^k B^jA\mathcal{D}(r+k+1-j) + B^{k+1}\mathbf{c}(0) \\
&= \sum_{j=0}^k B^jA\mathcal{D}(r+k+1-j) + B^{k+1}\mathbf{c}(0).
\end{aligned}$$

Thus, if the claim holds for $\Delta t = k$ it also holds for $\Delta t = k+1$; and we have that the claim holds for all $\Delta t \geq 0$. $\square$

Definition 10. A matrix $M_{n \times n}$ is **diagonally dominant** if $|M_{ii}| > \sum_{j \neq i}^n |M_{ij}|$. A matrix $M_{n \times n}$ is **normalized diagonally dominant** (normalized, for short) if M is diagonally dominant, and $|M_{ii}| \geq 1$.

Lemma 1. For a normalized diagonally dominant matrix W , it holds that $\|A\|_\infty \leq 1$ and $\|B\|_\infty < 1$, where A, B are defined in Eq. (5) and $\|A\|_\infty \triangleq \max_{\mathbf{x} \neq 0} \frac{\|A\mathbf{x}\|_\infty}{\|\mathbf{x}\|_\infty}$.

Proof: A is zero except for its main diagonal for which $A_{i,i} = w_{p_i,p_i} = \frac{1}{w_{i,i}}$. Since $|W_{i,i}| \geq 1$, we have that $|A_{i,i}| \leq 1$. Thus, it holds that $\|A\mathbf{x}\|_\infty \leq \|\mathbf{x}\|_\infty$. Furthermore, $\max_{\mathbf{x} \neq 0} \frac{\|A\mathbf{x}\|_\infty}{\|\mathbf{x}\|_\infty} \leq 1$, i.e., $\|A\|_\infty \leq 1$. Regarding B , $B_{i,j} = w_{p_i,p_j}$ for $i \neq j$ and 0 for $i = j$. Since W is assumed to be normalized diagonally dominant, we have that $\sum_{j \neq i} |W_{i,j}| < |W_{i,i}|$, thus $\sum_{j \neq i} |w_{p_i,p_j}| < 1$. Therefore, $\sum_j |B_{i,j}| = \sum_{j \neq i} |w_{p_i,p_j}| < 1$ for all i . In total, for any $\mathbf{x}$ we have $\|B\mathbf{x}\|_\infty < \|\mathbf{x}\|_\infty$, leading to $\|B\|_\infty < 1$. $\square$

If W is a diagonally dominant matrix then node p_i 's own input effects p_i 's output more than the sum of all of p_i 's neighbors outputs. That is, the weight of p_i 's input is at least the sum of weights of p_i 's neighbors outputs.

Theorem 1. *Given a normalized diagonally dominant and invertible W , there are constants c_1, c_2 , where $c_1 > 0$, and $1 > c_2 > 0$, such that SS-ITERATIVE ϵ -always converges with $\epsilon(\Delta t, \delta, \mathcal{C}) = \delta c_1 + (c_2)^{\Delta t} \|O(r) - \mathbf{u}\|_\infty$.*

Proof: By Lemma 1 it holds that $\|A\|_\infty \leq 1$ and $\|B\|_\infty < 1$. Consider a δ -bounded input sequence $\mathcal{I}$ around $\mathbf{v}$, and SS-ITERATIVE's run starting from an arbitrary state $O(r)$. We are interested in the behavior of $\|\mathbf{c}(\Delta t)\|_\infty$:

$$\begin{aligned}
\|\mathbf{c}(\Delta t)\|_\infty &= \left\| \sum_{j=0}^{\Delta t-1} B^j A \mathcal{D}(r + \Delta t - j) + B^{\Delta t} \mathbf{c}(0) \right\|_\infty \\
&\leq \left\| \sum_{j=0}^{\Delta t-1} B^j A \mathcal{D}(r + \Delta t - j) \right\|_\infty + \|B^{\Delta t} \mathbf{c}(0)\|_\infty \\
&\leq \sum_{j=0}^{\Delta t-1} \|B\|_\infty^j \|A \mathcal{D}(r + \Delta t - j)\|_\infty + \|B\|_\infty^{\Delta t} \|\mathbf{c}(0)\|_\infty \\
&\leq \delta \|A\|_\infty \sum_{j=0}^{\Delta t-1} \|B\|_\infty^j + \|B\|_\infty^{\Delta t} \|\mathbf{c}(0)\|_\infty \\
&= \delta \|A\|_\infty \frac{1 - \|B\|_\infty^{\Delta t}}{1 - \|B\|_\infty} + \|B\|_\infty^{\Delta t} \|\mathbf{c}(0)\|_\infty. \tag{7}
\end{aligned}$$

For an input sequence $\mathcal{I}$ that is δ -bounded around $\mathbf{v}$, denote by $\mathbf{u}$ the solution to the original system of equations $W\mathbf{u} = \mathbf{v}$. By Eq. (7),

$$\|O(r + \Delta t) - \mathbf{u}\|_\infty \leq \delta \|A\|_\infty \frac{1 - \|B\|_\infty^{\Delta t}}{1 - \|B\|_\infty} + \|B\|_\infty^{\Delta t} \|\mathbf{c}(0)\|_\infty.$$

Since $\|B\|_\infty < 1$, we have that $\frac{1 - \|B\|_\infty^{\Delta t}}{1 - \|B\|_\infty} \leq \frac{1}{1 - \|B\|_\infty}$ and by setting $c_1 = \frac{\|A\|_\infty}{1 - \|B\|_\infty}$ it holds that $\|A\|_\infty \frac{1 - \|B\|_\infty^{\Delta t}}{1 - \|B\|_\infty} \leq c_1$. By setting $c_2 = \|B\|_\infty$ and recalling that $\mathbf{c}(0) = O(r) - \mathbf{u}$ we are done. $\square$

Theorem 1 states sufficient conditions s.t. SS-ITERATIVE ϵ -always converges. Moreover, the algorithm SS-ITERATIVE is lightweight, as it requires nodes to send only a single value to every neighbor on each round.

6. Extension to the Asynchronous Model

Our second novel contribution is in extending our model to support asynchronous communications. In a large sensor network, it is unreasonable to as-

sume that the sensors operate in synchronous rounds. Furthermore, as known from the linear iterative algorithms literature, algorithms sometimes converge in less asynchronous rounds (when compared to synchronous rounds).

When considering the asynchronous model, it is more convenient to discuss shared-memory as means of communication.⁴ Thus, assume that for each directed edge between p_i, p_j there is a read-write register R_{p_i, p_j} that is written by p_i and read by p_j .

An asynchronous run is an infinite sequence of configurations $\mathcal{C}_0 \rightarrow \mathcal{C}_1 \rightarrow \dots$ such that some process p performs an atomic step between configuration $\mathcal{C}_i$ and $\mathcal{C}_{i+1}$. An atomic step consists of reading or writing from a single register. Notice that in the current model a configuration consists of all the registers and of the local variables at the different nodes.

In this section we again prove that starting from an arbitrary configuration, when the changes to the inputs are bounded, the outputs are bounded as well. We consider each configuration $\mathcal{C}_r$ to be assigned a vector input $I(r)$ such that if node p_i reads the input when performing an atomic step on $\mathcal{C}_r$ it reads the value of $I_{p_i}(r)$. Equivalently, the output vector of configuration $\mathcal{C}_r$ is $O(r)$.

Figure 2 outlines ASYNC-SS-ITERATIVE, which is a direct translation of SS-ITERATIVE to the shared-memory model.

ASYNC-SS-ITERATIVE consists of two phases: in the first, the previous value of O_{p_i} is written to all its neighbors' registers. In the second phase p_i calculates its new value of O_{p_i} by reading the registers of all its neighbors.

We consider only “fair” runs, in which each node performs an atomic step infinitely many times. Thus, each node performs both phases infinitely many times. A round is defined to be the shortest prefix of a run such that each node has performed at least once lines 02-07 in the algorithm. We number each atomic step and each round. Note that a round consists of many atomic steps.

We model a fair run as follows. Each node p_i performs infinitely many atomic steps, and participates in infinitely many rounds. Notice that the registers p_i reads in round $k+1$ have all been last written to, no earlier than during round k . Since a round consists of each node performing all the steps in the algorithm, each node p_i manages to read all of its neighboring registers

⁴In [10] it is shown how to convert an algorithm based on shared-memory to a message-passing algorithm with links of bounded capacity.

Algorithm ASYNC-SS-ITERATIVE

```

01: Forever do: /* executed on node  $p_i$  */
    /* write current value of  $O_{p_i}$  to all neighbors */
02:   for each  $p_j \in N(p_i)$ :
03:     write  $O_{p_i}$  to  $R_{p_i,p_j}$ ;

    /* update  $O_{p_i}$  according to values of neighbors */
04:   set  $O_{p_i} := w_{p_i,p_i} I_{p_i}$ ;
05:   for each  $p_j \in N(p_i)$ :
06:     read  $R_{p_j,p_i}$  into  $temp$ ;
07:     update  $O_{p_i} := O_{p_i} + w_{p_i,p_j} temp$ ;

08: od.

```

Figure 2: A self-stabilizing iterative algorithm for asynchronous networks.

and to write to all of its neighboring registers every round. Thus, there is some atomic step r (during round $k + 1$) such that:

$$O_{p_i}(r) = w_{p_i,p_i} I_{p_i}(r') + \sum_{j \neq i} w_{p_i,p_j} O_{p_j}(r'_j) ,$$

where r', r'_j (for all $p_j \neq p_i$) are smaller than r and are from at least round k .

Let $\mathbf{u}$ be such that $\mathbf{u} = A\mathbf{v} + B\mathbf{u}$, and let the inputs be from a δ -bounded input sequence around $\mathbf{v}$. Denote $\mathbf{c}(r) = O(r) - \mathbf{u}$ and $z = \max_i |\mathbf{c}_{p_i}(0)|$.

Theorem 2. *Given a normalized diagonally dominant and invertible W , and while considering only fair runs, there are constants c_1, c_2 , where $c_1 > 0$, and $1 > c_2 > 0$, such that ASYNC-SS-ITERATIVE ϵ -always converges with $\epsilon(\Delta t, \delta, \mathcal{C}) = \delta c_1 + (c_2)^{\Delta t} z$; where Δt counts the asynchronous rounds of a fair run.*

Proof: Notice that if p_i did not perform the r th atomic step then $O_{p_i}(r) = O_{p_i}(r - 1)$ and therefore $\mathbf{c}_{p_i}(r) = \mathbf{c}_{p_i}(r - 1)$. Consider the value of $\mathbf{c}_{p_i}(r)$

when p_i did perform the r th atomic step (during round $k + 1$).

$$\begin{aligned}
\mathbf{c}_{p_i}(r) &= O_{p_i}(r) - \mathbf{u}_{p_i} \\
&= w_{p_i,p_i} I_{p_i}(r') + \sum_{j \neq i} w_{p_i,p_j} O_{p_j}(r'_j) - w_{p_i,p_i} \mathbf{v}_{p_i} - \sum_{j \neq i} w_{p_i,p_j} \mathbf{u}_{p_i} \\
&= w_{p_i,p_i} (I_{p_i}(r') - \mathbf{v}_{p_i}) + \sum_{j \neq i} w_{p_i,p_j} (O_{p_j}(r'_j) - \mathbf{u}_{p_i}) \\
&= w_{p_i,p_i} (I_{p_i}(r') - \mathbf{v}_{p_i}) + \sum_{j \neq i} w_{p_i,p_j} \mathbf{c}_{p_j}(r'_j) ,
\end{aligned}$$

where r' and the different r'_j are smaller than r and are all from round k or round $k + 1$.

By using [Lemma 1](#) we get:

$$\begin{aligned}
|\mathbf{c}_{p_i}(r)| &\leq |w_{p_i,p_i} (I_{p_i}(r') - \mathbf{v}_{p_i})| + \max_{p_j} |c_{p_j}(r'_j)| \sum_{j \neq i} |w_{p_i,p_j}| \\
&\leq |w_{p_i,p_i} (I_{p_i}(r') - \mathbf{v}_{p_i})| + \|B\|_\infty |\mathbf{c}_{p_{max}}(r_{max})| \\
&\leq \delta + \|B\|_\infty |\mathbf{c}_{p_{max}}(r_{max})| ,
\end{aligned}$$

for some p_{max} and $r_{max} \leq r$ that is from round k or $k + 1$.

Therefore, for any p_i during round $k + 1$ there is a list of length $\ell \geq k$ of nodes $p_1, p_2, \dots, p_\ell$ and a sequence of length ℓ of atomic steps $r_1 > r_2 > \dots > r_\ell = 0$, such that

$$\begin{aligned}
|\mathbf{c}_{p_i}(r)| &\leq \delta + \|B\|_\infty |\mathbf{c}_{p_1}(r_1)| \\
&\leq \delta + \|B\|_\infty (\delta + \|B\|_\infty |\mathbf{c}_{p_2}(r_2)|) \\
&= \delta(1 + \|B\|_\infty) + \|B\|_\infty^2 |\mathbf{c}_{p_2}(r_2)| \\
&\leq \delta \sum_{z=0}^{\ell-1} \|B\|_\infty^z + \|B\|_\infty^\ell |\mathbf{c}_{p_\ell}(r_\ell)| \\
&= \delta \frac{1 - \|B\|_\infty^\ell}{1 - \|B\|_\infty} + \|B\|_\infty^\ell |\mathbf{c}_{p_\ell}(0)| .
\end{aligned}$$

Denote by $c_1 \triangleq \frac{1}{1 - \|B\|_\infty}$, and $c_2 \triangleq \|B\|_\infty$. We have that for node p_i performing the r th atomic step during round k it holds that $|\mathbf{c}_{p_i}(r)| \leq \delta c_1 + c_2^\ell z \leq \delta c_1 + c_2^k z$. $\square$

In fair runs, there are infinitely many rounds k , thus, as l and r go to infinity, we have that $\|O(r)\|_\infty$ is bounded by a hypercube of length δc_1 around $\mathbf{u}$.

7. Probabilistic Bound

In this section we analyze the behavior of the SS-ITERATIVE algorithm, when the input readings are normally distributed due to noisy readings.

Let $\mathcal{I}$ be an input sequence of length ℓ that is normally distributed around a mean vector $\mathbf{v}$. That is, $\mathcal{I} = I(r), I(r+1), \dots, I(r+\ell-1)$, where each is sampled i.i.d from a Gaussian distribution with mean $\mathbf{v}$ and covariance $\Sigma_{\mathbf{v}}$. Consider SS-ITERATIVE's run, starting from an arbitrary configuration at round r . We aim at showing that $O(r)$ is equivalent to a sequence $\mathcal{O}$ sampled i.i.d from a Gaussian distribution $\mathcal{O} \sim \mathcal{N}(\mathbf{u}, \Sigma_{\mathbf{u}})$ where $\mathbf{u}$ is the solution to $\mathbf{v}$.

Since we know the distribution $\mathcal{I}$, we can calculate $O(r)$ using [Eq. \(4\)](#) after $I(r)$ is sampled. $O(r)$, our sequence's starting point, can take arbitrary values as we will show that SS-ITERATIVE converges from any starting position.

We can now deduce that after k rounds of sampling the input distribution the output $O(k+1)$ is distributed as:

$$O(k+1) = AI(k+1) + BO(k) \sim \mathcal{N}(A\mathbf{v} + BO(k), A\Sigma_{\mathbf{v}}A^T). \quad (8)$$

This formulation is, however, dependant upon $O(k)$, or upon the specific samples of $I(\cdot)$. The output of each round is normally distributed with mean $A\mathbf{v} + BO(k)$ and with covariance matrix $A\Sigma_{\mathbf{v}}A^T$.

To find $\mathcal{O}$ we examine the recursive formula for $O(k+1)$. For simplifying notations, we mark the starting round r as round 0.

$$\begin{aligned} O(k+1) &= AI(k+1) + BO(k) \\ &= AI(k+1) + BAI(k) + B^2O(k-1) \\ &\vdots \\ &= AI(k+1) + BAI(k) + \dots + B^k(AI(1) + BO(0)). \end{aligned}$$

Now we take $k \rightarrow \infty$ to find the distribution $\mathcal{O}$:

$$\mathcal{O} \propto \lim_{k \rightarrow \infty} (I_{n \times n} + B + B^2 + \dots + B^k)A\mathcal{I} + \lim_{k \rightarrow \infty} B^{k+1}O(0). \quad (9)$$

By [Lemma 1](#) it holds that $\|B\|_{\infty} < 1, \lim_{k \rightarrow \infty} B^k = 0$. Using the Maclaurin series we get:

$$\lim_{k \rightarrow \infty} I_{n \times n} + B + B^2 + \dots + B^k = (I_{n \times n} - B)^{-1}.$$

Denoting $\hat{B} \triangleq (I_{n \times n} - B)^{-1}$ we write the distribution of $\mathcal{O}$:

$$\mathcal{O} \propto \hat{B}A\mathcal{I} \sim \mathcal{N}(\hat{B}A\mathbf{v}, A\hat{B}^T\Sigma_{\mathbf{v}}\hat{B}A).$$

Recall the definitions of A and B (5) and find that:

$$\hat{B}A = (I_{n \times n} - B)^{-1}A = (I_{n \times n} + AW - I_{n \times n})^{-1}A = (AW)^{-1}A = W^{-1}.$$

Note that the output sequence can now be characterized more intuitively as:

$$\mathcal{O} \propto W^{-1}\mathcal{I} \sim \mathcal{N}(\mathbf{u}, W^{-1}\Sigma_{\mathbf{v}}W^{-1T}).$$

Using known bounds such as multivariate extensions of Chebyshev's bound one can now introduce bounds similar in nature to the box bounds discussed earlier. A better bound can be acquired using the cumulative distribution function for normal distributions; however these can only be estimated numerically. The use of such bounds is:

$$p \triangleq \Pr(\|I(k) - \mathbf{v}\| \leq \delta), \quad \exists \varepsilon \mid \Pr(\|O(k) - \mathbf{u}\| \leq \varepsilon) = p,$$

where the connection between δ and ε depends on the specific bound used.

So far we have shown that SS-ITERATIVE is tolerant towards Gaussian noise, and the output sequence converges to a sequence drawn i.i.d from a normal distribution around the expected solution.

7.1. The Asynchronous Setting

Our proof so far discussed the synchronous case. Next, we extend the analysis of the probabilistic bound for asynchronous case, under mild assumptions. We assume the ‘‘Totally Asynchronous’’ model as discussed in [3]. We denote T^i as the set of times in which the i 'th node updates its neighbors with new output values. We further denote $\tau^i(t_k)$ as the vector containing the last update times of all received messages at node i at time t_k .

Definition 11. Total Asynchronism: *the sets T^i are infinite and if $\{t_k\}$ is a sequence of elements of T^i that tends to infinity, then $\lim_{k \rightarrow \infty} \tau_j^i(t_k) = \infty$ for every j .*

This assumption implies that every node is updated infinitely often while allowing maximal flexibility for delay and loss of data.

[3] gives a converges proof for the asynchronous case, to an iterative algorithm with constant input values. The challenge we face is that the input is not constant, but distributed normally. Thus we need to prove that the solution does not infinitely diverge.

For proving that the algorithm output does not diverge, we require some further assumptions. We assume that the update times of each of the nodes are independent of the distribution $\mathcal{I}$. The second assumption we make is that the input noise distribution is normally distributed, where the noisy reading in different sensors are not correlated. In other words, the inverse covariance matrix of the input is a diagonal matrix.

To prove that under these assumptions $\mathcal{O}$ is normally distributed we define the set T :

$$T = \{t \mid \exists i : t \in T^i\}.$$

Denote $t_{(i)} = 0, \dots$ as the ordered sequence of times in T . For all $t_{(i)} \in T$ we need to find the distribution of the input at time $t_{(i)}$.

Theorem 3. *The infinite input sequence $I(t_{(i)})$ is distributed normally with $\mathcal{I}$.*

Proof: As $\mathcal{I}$ is normally distributed, any marginal distribution computed by a subset of the nodes is normally distributed as well. Now we can induce the requested theorem:

Induction base: By the *Total Asynchronism* assumption there exists a time $t_0 > 0$ at which all nodes have updated their value, and thus the input of each node is now drawn from its marginal distribution. This means that at time t_0 the distribution of the entire input vector is (by cartesian product) drawn from $\mathcal{I}$.

Induction hypothesis: At time $t = t_{(i)}$ we assume the input distribution is distributed normally from $\mathcal{I}$.

Induction step: At time $t = t_{(i+1)}$ we separate the nodes into two groups: The first group contains nodes that remained constant from the previous round, that is, their a-priori distribution is their marginal distribution drawn from $\mathcal{I}$ by our induction hypothesis.

The second group contains nodes that are updated with a new input value at this round; this value is distributed again from their marginal distribution.

Notice that all of these marginal distributions are Gaussian, thus, their cartesian product is Gaussian as well. In addition, any joint covariance between nodes is 0 due to our assumption. Therefore, we have a cartesian product of all of the nodes distributed as marginal distribution of $\mathcal{I}$ and thus the entire input $I(t_{i+1})$ follows the distribution $\mathcal{I}$.

Finally we induce that at all $t_{(i)} \in T$: $I(t_{(i)})$ are drawn from $\mathcal{I}$. Note that unlike the synchronous model - these samples are no longer taken i.i.d from the distribution $\mathcal{I}$. $\square$

Now we can use [Theorem 3](#) and the *Total Asynchronism* assumption to draw a similar proof to the synchronous case. Recalling [Eq. \(9\)](#):

$$\mathcal{O} \propto \lim_{k \rightarrow \infty} (I_{n \times n} + B + B^2 + \dots + B^k)A\mathcal{I} + \lim_{k \rightarrow \infty} B^{k+1}O(0).$$

[Theorem 3](#) shows that the input distribution, at all rounds, is drawn from $\mathcal{I}$. This implies that we may apply the Maclaurin series again:

$$\lim_{k \rightarrow \infty} I_{n \times n} + B + B^2 + \dots + B^k = (I_{n \times n} - B)^{-1}.$$

We now turn to [\[3, Section 6.3.2\]](#) where the following claim is proven:

Lemma 2. *For a normalized diagonally dominant matrix γA , it holds that $x = (I_{n \times n} - \gamma A)x + \gamma b$ asynchronously converges.*

We now make use of [Lemma 2](#) under the following notations: $b = 0$, which means that our solution converges to 0. Recalling [Eq. \(5\)](#): $B = I_{n \times n} - AW$, where W is diagonally dominant and A is a diagonal matrix, results in AW being diagonally dominant. Combining these results together, we conclude that B is a contraction, thus the linear dynamical system $x = Bx$ converges to zero for any initial x :

$$\lim_{k \rightarrow \infty} B^{k+1} = 0.$$

Regarding convergence speed, the speed at which the initial output factor converges to 0 and the output distribution converges to a normal distribution, is dependant upon the rate of the least updated node. These settings, though somewhat more restricting than the ones used for synchronous convergence, are all “minimal” in the sense that removing any of them creates a system that may diverge. Further discussion about the validity of the above assumptions is given in [Section 9](#).

8. Experimental Results

8.1. Box Bound

For illustrating the behavior of our proposed algorithm using the box bound assumption, we have simulated SS-ITERATIVE using two sample topologies of one hundred nodes. Figure 3 depicts a circular topology where each node is connected to its left and right neighbors. Figure 4 shows a random unit disc graph, where nodes are randomly spread on a plane, and each node is connected to the nodes that are within a distance of 1. The X-axis shows the number of iterations, and the Y-axis shows the value of δ . Area colors in the heatmap depict the average of the following procedure: randomly select a vector $\mathbf{v}$ and a δ -bounded sequence around $\mathbf{v}$, run the simulation for the randomly selected values and return the L_∞ distance between the last output vector and $\mathbf{u}$ (calculated as $\mathbf{u} = W^{-1}\mathbf{v}$). The heatmap uses a log log scale. Both graphs clearly show that as δ decreases and the number of iterations increases, the output of SS-ITERATIVE converges to be bounded by a small hypercube around $\mathbf{u}$.

Note that the unit disc weighted topology matrix is characterized by $\|A\|_\infty = 0.02, \|B\|_\infty = 0.97$ while the circle graph is characterized by $\|A\|_\infty = 0.33, \|B\|_\infty = 0.66$. As expected, using unit disc topology requires a larger number of iterations for convergence (depends on $\|B\|_\infty$). In addition, in the unit disc topology the value of δ has a smaller effect on the convergence, due to the value of $\|A\|_\infty$, which affects the minimal radius around the output. Since $\|A\|_\infty$ is smaller in the unit disc topology, increasing δ does not significantly affect the convergence.

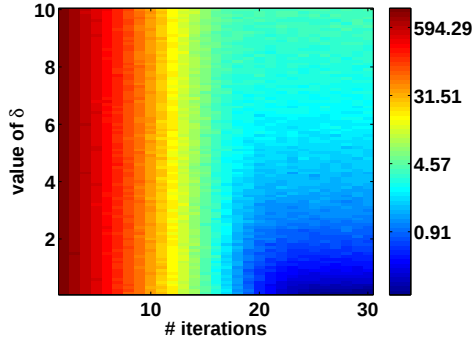


Figure 3: Sim. of a Circle graph.

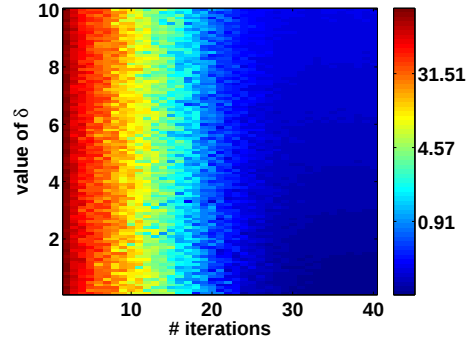


Figure 4: Sim. of a Unit-Disc graph.

8.2. Probabilistic Bound

We have simulated a run of SS-ITERATIVE, when the input noise is i.i.d. normally distributed. Figure 5 plots the behavior of the output distribution at specific rounds. The input distribution of two nodes, printed in blue, is a normal distribution where the two nodes are uncorrelated. The output (in red, growing darker in later rounds) are distributed around some round mean, with the means themselves distributed around $\mathbf{u}$. It is important to note there is no greedy convergence to $\mathbf{u}$. This is because each round contains a different noise sample and thus at a specific round our solution can stray away from $\mathbf{u}$.

Figure 6 plots the behavior of the mean value of the input and output to the large system limit. The input is to the right (in blue axes) the output is to the left (gray circles). After a large number of rounds, the output is normally distributed around $\mathbf{u}$, where the plotted $\mathbf{u}$ (in green) is the result of an EM estimation of the sample mean.

Figure 7 plots a similar experiment from a different angle. This figure shows the input reading of the nodes (to the right) which is spherically distributed in a circle because the input noise is uncorrelated. The output of the SS-ITERATIVE algorithm (to the left) is correlated among nodes, as seen by the elliptic shape of the distribution. The correlation of the output distribution is supported by the theoretical results.

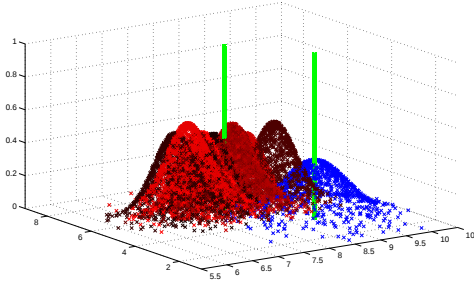


Figure 5: Output of several rounds.

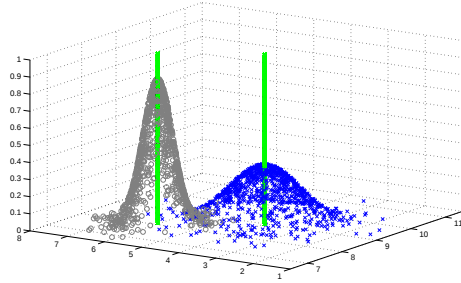


Figure 6: Convergence behavior.

9. Discussion

We have shown that the algorithm SS-ITERATIVE is a modification of the Jacobi iterative method to solve a set of equations $A\mathbf{x} = \mathbf{b}$, where A




Figure 7: Self correlation of input and output.

is given and $\mathbf{b}$ is dynamically changing but bounded or statistical. Moreover, [Theorem 1](#) is a generalization of previous analysis of Jacobi’s convergence. Our motivation for SS-ITERATIVE originates from the sensor calibration problem, where sensors need to calibrate their noisy readings. Unlike previous approaches to this problem, we assume a dynamic system with an infinite execution of the algorithm. In this setting the readings of the sensors continuously change. Under the assumption that the readings’ changes are bounded, we have shown that the calibrated output is bounded as well.

Further application for SS-ITERATIVE can be found in any setting where it is desired to solve $A\mathbf{x} = \mathbf{b}$ in a converging and self-stabilizing manner, while A is given, and $\mathbf{b}$ may change slightly from one round to the next. Notice that the analysis given in [Section 5](#) holds in such a system.

As noted in [Remark 2](#) the matrix A is “part of the code”. An optional alternative to the current solution is to compute A^{-1} (the inverted matrix of A) beforehand and include it “as part of the code”. Thus, each node could locally solve $\mathbf{x} = A^{-1}\mathbf{b}$, and it can be shown that $\mathbf{x}$ will be bounded (as long as $\mathbf{b}$ is bounded). The main problem with such a solution is the connectivity requirements it incurs. In our solution, scalar values are sent in the network only between direct neighbors. The matrix W represents a weighted adjacency graph. Once inverted, the matrix W^{-1} might not be sparse. A non-zero entry $w_{ij}^{-1} \in W^{-1}$ means that node p_i needs to communicate with node p_j . This extra communication might cause the algorithm to lose its self-stabilizing properties, as non-neighboring nodes would require a self-stabilizing overlay network for their communication.

The assumption of a predefined A is suitable for static networks in which the communication graph is predetermined. For dynamic networks, it would

be interesting to adjust SS-ITERATIVE to discover the connectivity of the network, inferring the optimal weights dynamically. We assume that after the weights are calculated, the topology of the sensor network remains stable, thus the convergence analysis of [Section 5](#) should hold.

9.1. Necessity of Convergence Conditions for the Probabilistic Bound

Assuming that the sensor input readings are normally distributed due to measurement noise, the resulting output is also normally distributed. As discussed in [Section 7](#), this is not a sufficient condition for the convergence of SS-ITERATIVE in a finite number of rounds.

We give the following example to demonstrate the claim above. Assume the input reading at round 1 is larger than $\mathbf{v}$, and at each of the following rounds the input reading of each node is larger than at the previous round. As the input is normally distributed, for every $n > 0$ there is a small but positive chance for such a sequence of length n . Input sequence behaving as described would lead SS-ITERATIVE to a growing output sequence for n rounds, meaning for the duration of these rounds SS-ITERATIVE diverges. Thus it is obvious the mean can be infinitely far from $\mathbf{u}$ as long as n is finite. However, when n is large, the probability of such an anomaly is diminishing to zero.

The convergence results for the asynchronous case had a minimal set of assumptions. One of them is that the input noise distribution must be uncorrelated among nodes. That is because if the input noise distribution is correlated, all nodes must sample the input concurrently, an assumption which is not valid under the asynchronous model.

9.2. Relation to Perturbation Theory

A large amount of research focused on the problem of solving $A\mathbf{x} = \mathbf{b}$ when A and $\mathbf{b}$ are not exactly known. That is, let $\hat{A} = A + \delta A$ and $\hat{\mathbf{b}} = \mathbf{b} + \delta \mathbf{b}$, and consider the equation $\hat{A}\hat{\mathbf{x}} = \hat{\mathbf{b}}$; what can be said about $\mathbf{x}$ in relation to $\hat{\mathbf{x}}$?

Our setting is “easier” in one sense, and “harder” in a different sense. In our setting A is known, *i.e.*, $\delta A = 0$. However, $\hat{\mathbf{b}}$ is not well defined. That is, the input vector - which is described by $\hat{\mathbf{b}}$ - changes over time. When solving $\hat{A}\hat{\mathbf{x}} = \hat{\mathbf{b}}$ it is assumed that there is some $\mathbf{b}$ that is *constant* but it was measured with an error. In our case, $\mathbf{b}$ is not constant as it changes over time, while it represents the measurements correctly.

As a future research, it would be interesting to consider the implications of adding inaccuracy to the measurements. The vast body of knowledge regarding perturbation theory would definitely aid in this extension to our model.

9.3. Relation to Convex Optimization

Many practical optimization problems are given in the quadratic form $f(x) = 1/2\mathbf{x}A\mathbf{x} - \mathbf{b}^T\mathbf{x}$, where the task is to compute $\min_{\mathbf{x}} f(\mathbf{x})$ distributively over a communication network. A survey showing several applications can be found in [4]. Example applications are monitoring, distributed computation of trust and ranking of nodes and data items.

A standard way for solving $\min_{\mathbf{x}} f(\mathbf{x})$ is by computing the derivative and comparing it to zero to get the global optimum. When the matrix A is symmetric, $f'(\mathbf{x}) = A\mathbf{x} - \mathbf{b} = 0$, and we get a linear system of equations $A\mathbf{x} = \mathbf{b}$. In other words, the convex optimization problem is reduced into a solution of a linear system of equations.

Interior point methods [7, Ch. 11] solve linear programming problems by applying Newton method iteratively. Each computation of the Newton step involves a solution of a linear systems of equations. An area of future work is to examine the applications of our self-stabilizing algorithm to these methods. The difficulties arise from the fact that the matrix A needs to be recomputed between iterations, so nodes need to be synchronized and aware of the current iteration taking place.

Acknowledgements

The authors would like to thank Golan Pundak for assisting with the simulations, and the anonymous reviewers of SSS-08 conference for their helpful comments.

References

- [1] R. M. Bell and Y. Koren. Scalable collaborative filtering with jointly derived neighborhood interpolation weights. In *IEEE International Conference on Data Mining (ICDM'07)*, 2007.
- [2] D. P. Bertsekas and J. N. Tsitsiklis. *Parallel and Distributed Calculation. Numerical Methods*. Prentice Hall, 1989.

- [3] J. N. Bertsekas, D. P.; Tsitsiklis. *Parallel and Distributed Computation: Numerical Methods*. Athena Scientific, 1997.
- [4] D. Bickson and D. Malkhi. A unifying framework for rating users and data items in peer-to-peer and social networks. In *Peer-to-Peer Networking and Applications (PPNA) Journal*, Springer-Verlag, 2008.
- [5] D. Bickson, O. Shental, P. H. Siegel, J. K. Wolf, and D. Dolev. Linear detection via belief propagation. In *Proc. 45th Allerton Conf. on Communications, Control and Computing*, Monticello, IL, USA, September 2007.
- [6] C. Bowick. *RF Circuit Design*. Newnes, 1997.
- [7] S. Boyd and L. Vandenberghe. *Convex Optimization*. Cambridge University Press, March 2004.
- [8] L. Davidovitch, S. Dolev, and S. Rajsbaum. Stability of multivalued continuous consensus. *SIAM Journal on Computing*, 37(4):1057–1076, 2007.
- [9] D. Dolev and E. N. Hoch. Ocd: Obsessive consensus disorder (or repetitive consensus). In *Proc. of the 27th Int. Symposium on Principles of Distributed Computing (PODC'08)*, Toronto, Canada, Aug. 2008.
- [10] S. Dolev. *Self-Stabilization*. The MIT Press, 2000.
- [11] S. Dolev and S. Rajsbaum. Stability of long-lived consensus. *J. Comput. Syst. Sci.*, 67(1):26–45, 2003.
- [12] P. C. Dunn. *Gateways Into Electronics*. Wiley-IEEE, 2000.
- [13] J. Fang and H. Li. Distributed event-region detection in wireless sensor networks. In *EURASIP J. Adv. Signal Process*, volume 2008, pages 1–10, New York, NY, United States, January 2008. Hindawi Publishing Corp.
- [14] K. Langendoen and N. Reijers. Distributed localization in wireless sensor networks: a quantitative comparison. In *Comput. Networks*, volume 43, pages 499–518, New York, NY, USA, November 2003. Elsevier North-Holland, Inc.

- [15] K. Marzullo. Tolerating failures of continuous-valued sensors. *ACM Trans. Comput. Syst.*, 8(4):284–304, 1990.
- [16] R. Olfati-Saber. Distributed Kalman Filtering for Sensor Networks. In *Proc. of the 46th IEEE Conference on Decision and Control*, December 2007.